

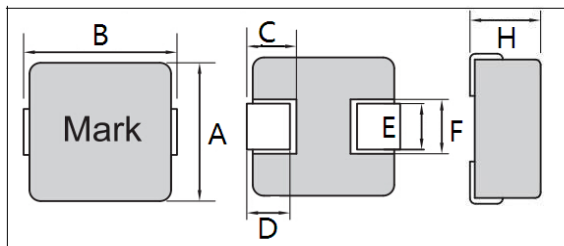


Anruike/安瑞科 车规级电感 ASDC 系列 (采用不锈钢粉压铸)

外型及尺寸 Shape and size (unit: mm) www.anruike.com Tel:0755-29805463



产品型号	A	B (Max)	H(Max)	C	D	E	F	N	J	G	unit package
ASD0312	3.0	3.4	1.2	0.9	0.6	1.0	1.4	4.2	1.0	1.2	3000PCS/R

电气参数 Electrical parameters www.anruike.com Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DCResistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC0312-R68M	0.68	100KHz/1.0V	46	55	2.5	4
ASDC0312-1R0M	1.0	100KHz/1.0V	68	85	2	3.2
ASDC0312-1R5M	1.5	100KHz/1.0V	105	135	1.8	2.8
ASDC0312-2R2M	2.2	100KHz/1.0V	130	165	1.5	2.2
ASDC0312-3R3M	3.3	100KHz/1.0V	215	260	1	1.8

本页面未能录入全部或最新的参数，仅供参考，请您在订购前向本公司索要精准参数及样品。
Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%，M 表示电感值的公差为±20%，N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

深圳市安瑞科电子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com