

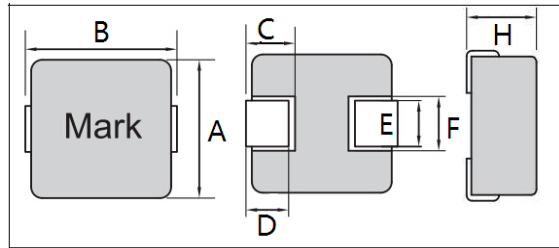


Anruike/安瑞科 车规级电感 ASDC 系列 (采用不锈钢粉压铸)

外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科 www.anruike.com Tel:0755-29805463



| 产品型号 | A | B (Max) | H (Max) | C | D | E | F | N | J | G | unit package |
|----------|-----|---------|---------|-----|-----|-----|-----|-----|-----|-----|------------------|
| ASDC0315 | 3.0 | 3.4 | 1.5 | 0.9 | 0.6 | 1.0 | 1.4 | 4.2 | 1.0 | 1.2 | 3000PCS/R |

电气参数 Electrical parameters

Anruike/安瑞科 www.anruike.com Tel: 0755-29805463

| 产品型号 Part NO | 电感量 Inductance L (uH) ±20% | 测试条件 Test Condition | 直流电阻 (mΩ) DCResistance | | 温升电流 Heat Rated Current (A)Max | 饱和电流 Saturation Current (A) (Max) |
|-----------------|----------------------------------|------------------------|---------------------------|-----|---|--|
| | | | Typical | Max | | |
| ASDC0315-R22M | 0.22 | 100KHz/1.0V | 11 | 14 | 5 | 8 |
| ASDC0315-R33M | 0.33 | 100KHz/1.0V | 16 | 19 | 4 | 7 |
| ASDC0315-R47M | 0.47 | 100KHz/1.0V | 24 | 29 | 3.5 | 5.5 |
| ASDC0315-R56M | 0.56 | 100KHz/1.0V | 31 | 37 | 3 | 5 |
| ASDC0315-R68M | 0.68 | 100KHz/1.0V | 42 | 50 | 3 | 4.5 |
| ASDC0315-R82M | 0.82 | 100KHz/1.0V | 49 | 58 | 2.8 | 3.8 |
| ASDC0315-1R0M | 1.0 | 100KHz/1.0V | 56 | 68 | 2.5 | 3.5 |
| ASDC0315-1R5M | 1.5 | 100KHz/1.0V | 78 | 92 | 2 | 3 |

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

深圳市安瑞科电子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com