

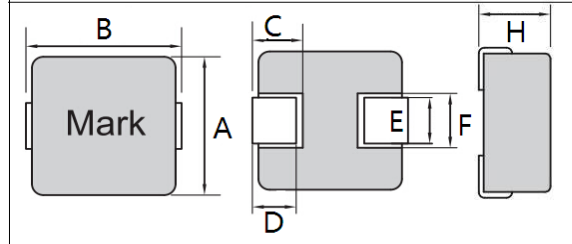


外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科 www.anruike.com Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC1030	10.0	11.5	3.0	2.5	2.0	3.0	5.0	13.6	5.4	4.1	500PCS/R

电气参数 Electrical parameters

Anruike/安瑞科 www.anruike.com Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC1030-R12M	0.12	100KHz/1.0V	0.65	0.75	30.0	75.0
ASDC1030-R33M	0.33	100KHz/1.0V	1.3	1.6	23.0	32.0
ASDC1030-R36M	0.36	100KHz/1.0V	1.3	1.6	23.0	26.0
ASDC1030-R47M	0.47	100KHz/1.0V	2.1	2.5	23.0	24.0
ASDC1030-R56M	0.56	100KHz/1.0V	2.4	3.0	22.0	23.0
ASDC1030-R68M	0.68	100KHz/1.0V	2.9	3.4	21.0	21.0
ASDC1030-1R0M	1.0	100KHz/1.0V	5.3	6.0	15.0	20.0
ASDC1030-1R5M	1.5	100KHz/1.0V	6.5	7.5	13.5	16.0
ASDC1030-2R2M	2.2	100KHz/1.0V	8.0	9.0	13.0	14.0
ASDC1030-3R3M	3.3	100KHz/1.0V	14.5	16.0	9.0	13.0
ASDC1030-4R7M	4.7	100KHz/1.0V	20.5	22.5	7.0	8.5
ASDC1030-8R2M	8.2	100KHz/1.0V	35.0	45.0	5.0	7.5
ASDC1030-100M	10.0	100KHz/1.0V	50.0	55.0	5.0	6.0
ASDC1030-150M	15.0	100KHz/1.0V	59.0	65.0	4.0	5.0
ASDC1030-220M	22.0	100KHz/1.0V	90.0	99.0	3.0	4.0

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.